


SKY WORLD CERAMIC

800 x 1600











the most valuable resource deserves respect



800x1600mm carving + matt surface

We get closer to supply sources, promoting national and European options. We encourage reuse and recycling. Defending the planet means looking ahead, ensuring also the future of our industry

Natural resources are a gift of which humanity must show himself worthy, taking care of them. To slow down unique and finite resources exploitation, we turn our commitment to a growing use of materials renewable and responsible.



introductio n punch



Our ceramic makes colour tangible, creating a surface on which tactile and visual sensations are permanently contaminated. From every combination of colours and materials comes something new and surprising, theatre of always different emotions.









give your space a personalized touch















torano bianco

STONECRAFT collection







tectonic almond



tectonic almond









tectonic sand



tectonic sand

STONECRAFT collection














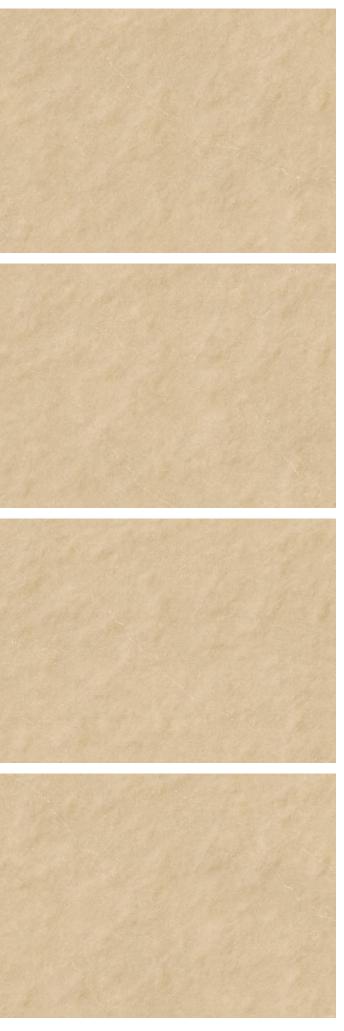




tectonic grey









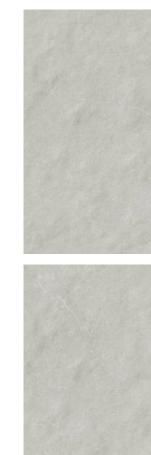





tectonic gris



tectonic gris

STONECRAFT collection











matriu m neach



matrium peach


STONECRAFT collection



Touch for Virtual <mark>ر 360 °</mark>





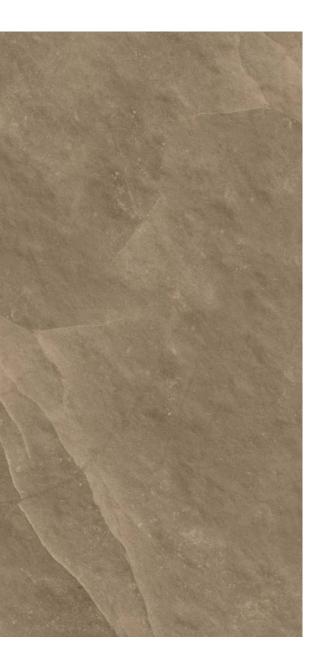

matriu m carame



matrium carame

STONECRAFT collection


















matriu m nacar

matrium nacar

STONECRAFT collection




Touch for Virtual $<360^{\circ}$

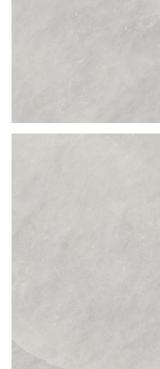






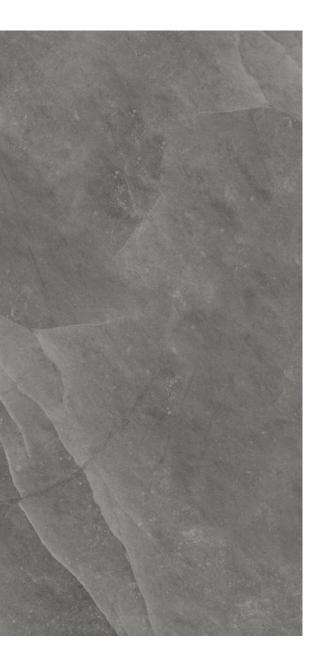

matriu m slate



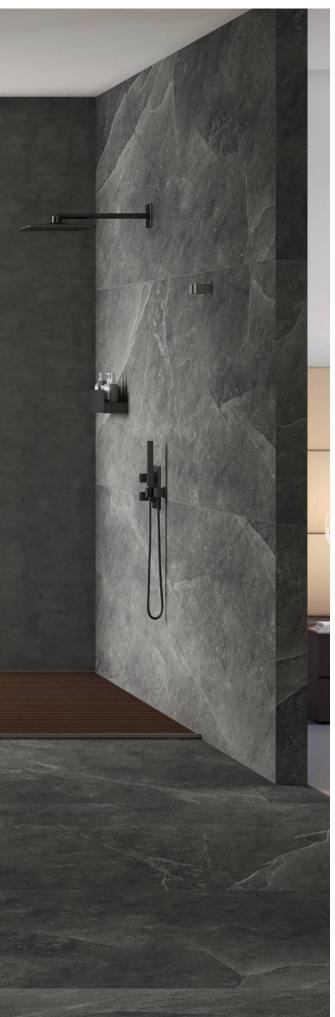

matrium slate

STONECRAFT collection












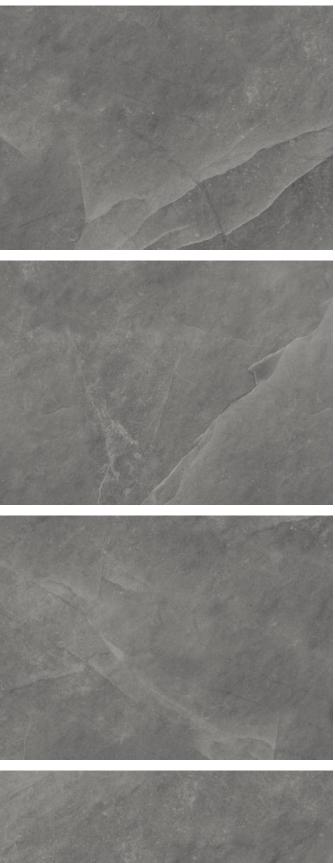



matriu m blu



matrium blu

STONECRAFT collection





















We design living consider the environment













icelan d cielo



iceland cielo

STONECRAFT collection



Touch for Virtual <mark>< 360°</mark>







icelan d agua




iceland aqua

STONECRAFT collection




Touch for Virtual <u>360°</u>



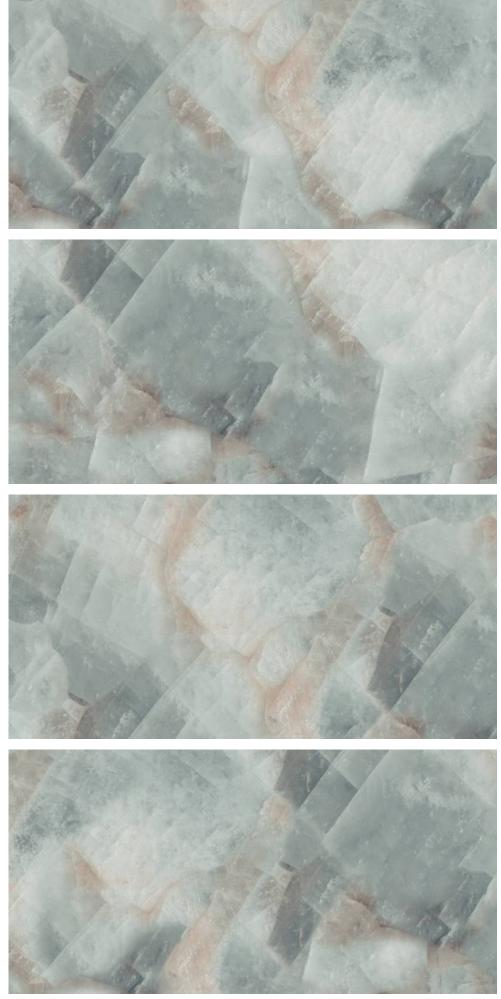



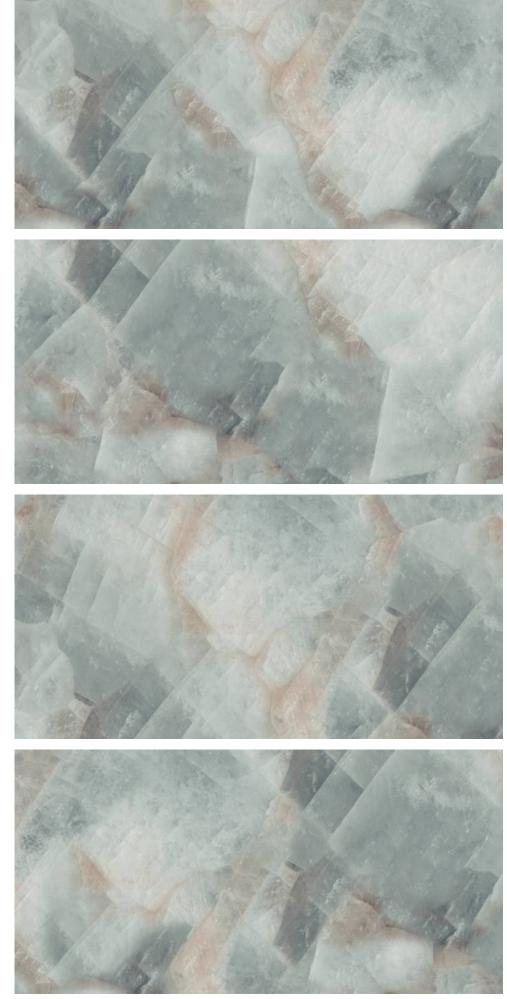







cotta silver

STONECRAFT collection












cotta grafito

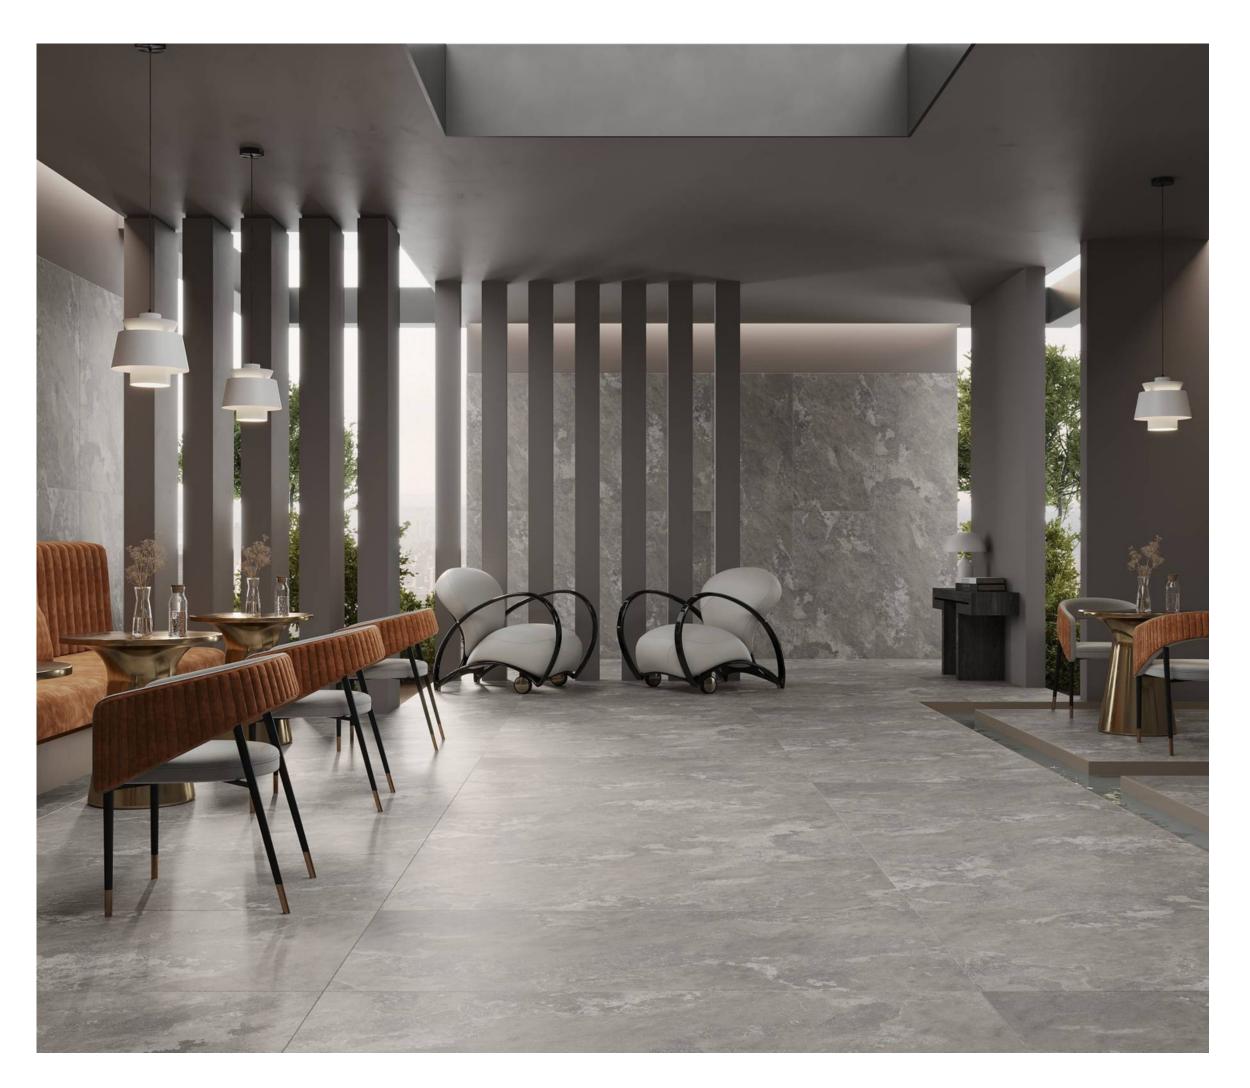

cotta grafito














cotta verde

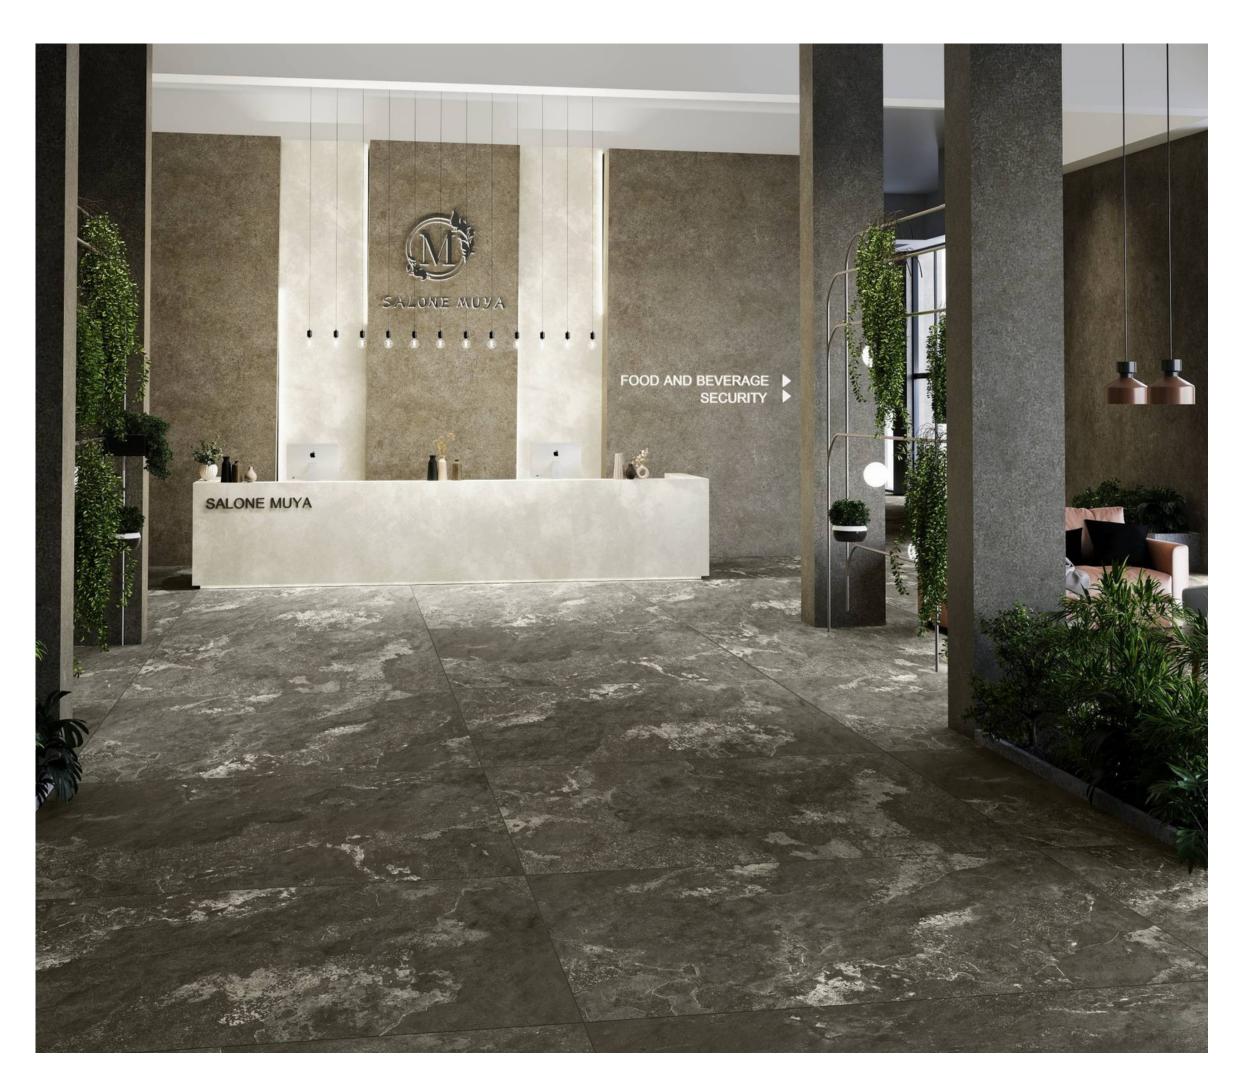

cotta verde


STONECRAFT collection



Touch for Virtual **360**°





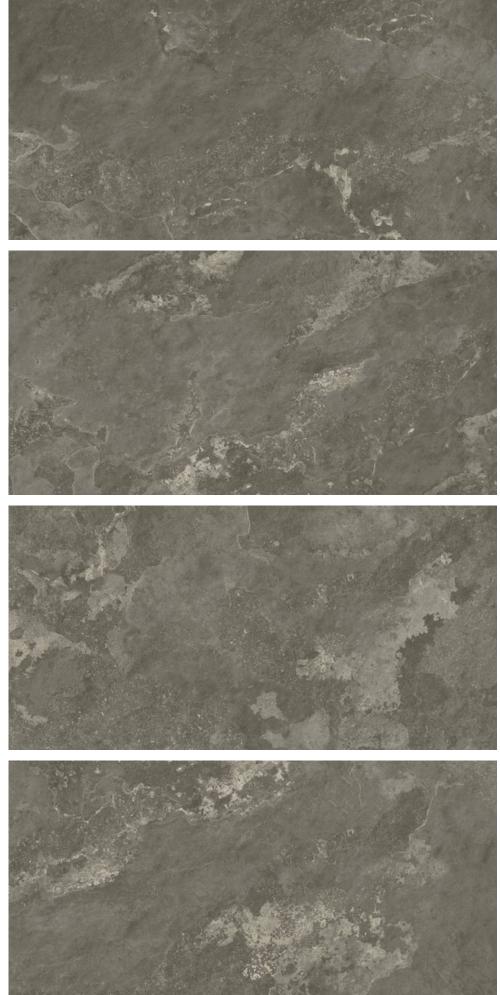


















rock apuano extra



rock apuano extra

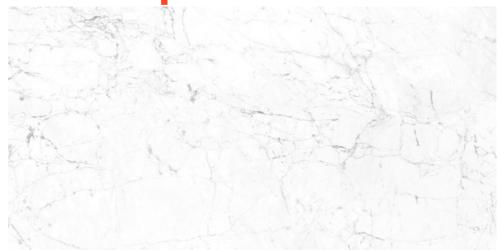



STONECRAFT collection





cassero almon



cassero almond






STONECRAFT collection









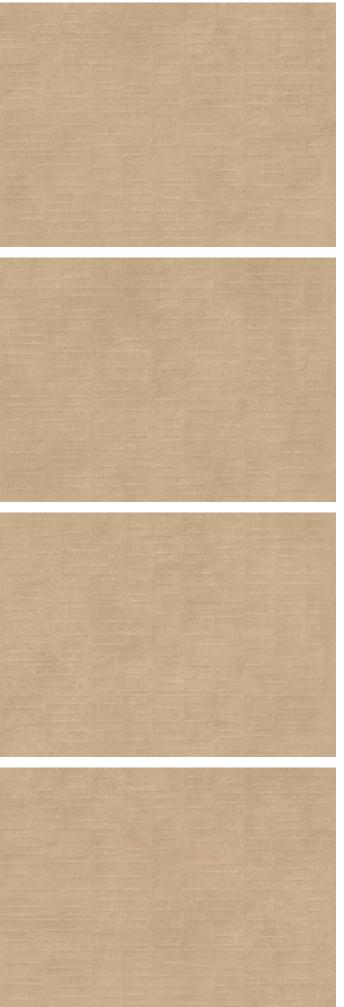



cassero amber



cassero amber






STONECRAFT collection









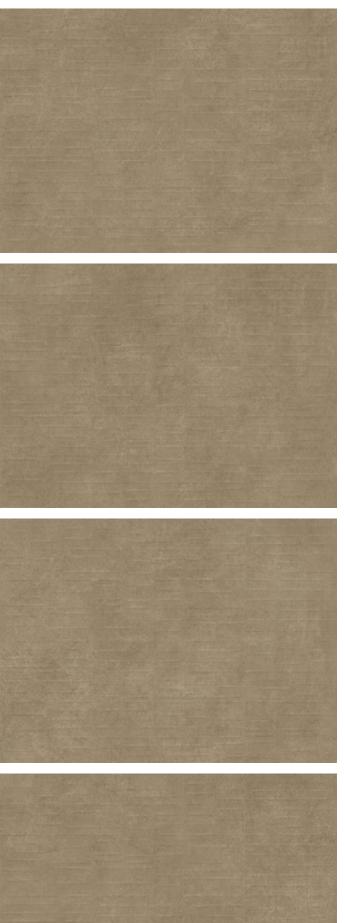



cassero blanc




cassero blanc





STONECRAFT collection

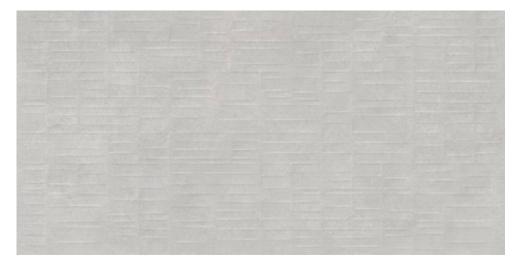









cassero pewter

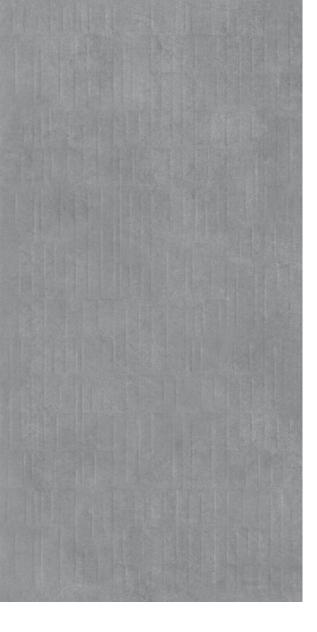



cassero pewter

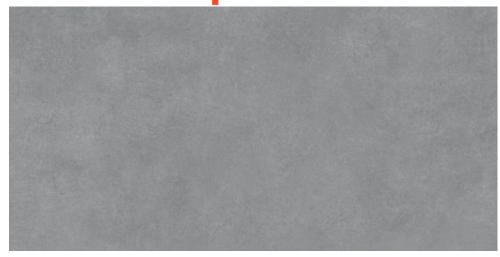




STONECRAFT collection











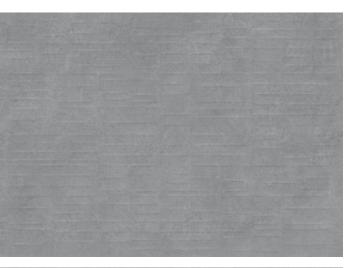










cassero anthracite

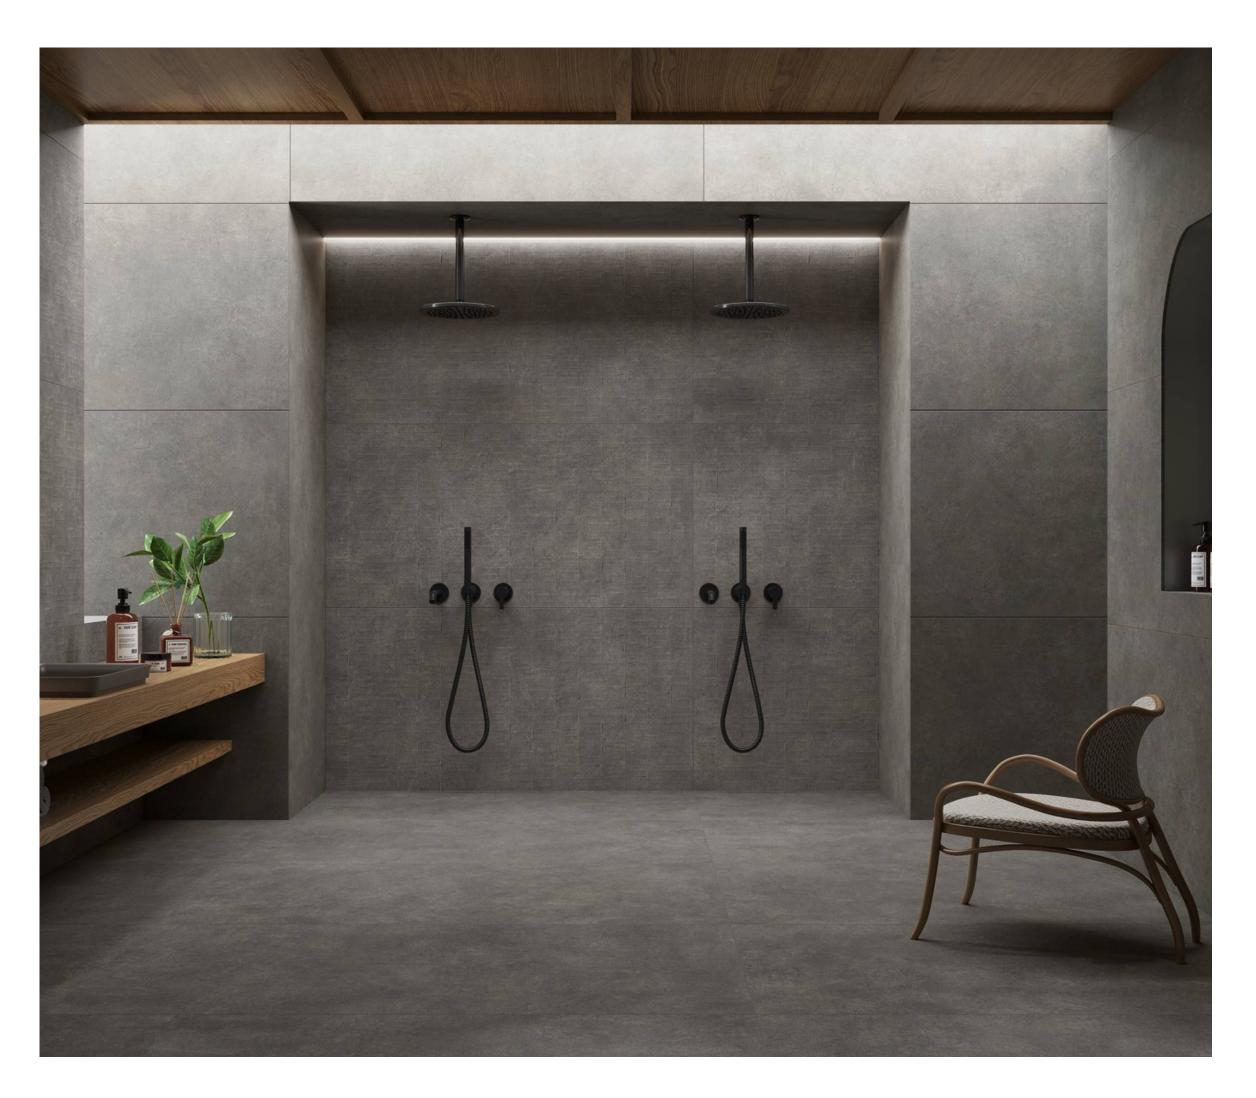

cassero anthracite





STONECRAFT collection



















TECHNICAL SPECIFICATION

CHARACTERISTIC ISO-13006/EN 14411 GROUP Bla		MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD	
REGULATORY PROPERTIES					
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2	
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2	
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2	
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2	
Surface flatness	±0.5 %	±0.2 % ±0.2 %		ISO-10545-2	
Color difference	Unaltered	No change	No change	ISO-10545-16	
Glossiness	As per mfg	fg Min 90% Min 4%		GLOSSOMETER	
STRUCTURAL PROPERTIES					
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3	
Apparent density	Apparent density > 2.0 g/cc		>2.10 g/cc >2.10 g/cc		
MASSIVE MECHANICAL PROP	PERTIES				
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4	
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4	
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5	

SURFACE MECHANICAL PROPERTIES

Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101

THERMO HYGROMETRIC PROPERTIES

Frost resistance	No damage	No damage	No damage	ISO-10545-12	
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9	
Moisture expansion	Nil	Nil	Nil	ISO-10545-10	
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8	
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11	

CHEMICAL PROPERTIES

Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14

SAFETY PROPERTIES							
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17			
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.			
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15			



PACKING DETAILS

SR. NO	PRODUCT	NOMINAL SIZE	THICKNESS	TILES PER BOX	WEIGHT	COVERAGE AREA
1	VITRIFIED TILES	800x1600mm	9mm	2	52 kg	2.56 Sq. Mtr.